

- ▶ Application: -40 to 130°C
- ▶ Accuracy at 25°C: ± 1.4°C
- ▶ Accuracy at 100°C: ± 3.4°C
- ▶ Male thread: M12 x 1.5
- ▶ Nominal resistance: 2.5 kOhm ± 5 % (at 20°C)

This sensor is designed to measure air temperature e.g. in the air box or ambient temperature. This signal may be used as a control value for engine control units or as a measurement value which is logged in a data acquisition system.

The NTC sensing element has a negative temperature coefficient. This means, that with increasing temperature the conductivity rises. The sensing element of the temperature sensor is made of semiconducting heavy metal oxide and oxidized mixed crystals, which are equipped with a protective housing. The main benefit of the sensor is the combination of a high quality production part and a robust and compact design.

#### Application

Application	-40 to 140°C
Storage temp. range	-30 to 60°C
Bio fuel compatibility	E85/M22
Max. vibration	300 m/s <sup>2</sup> at 50 to 250 Hz


#### Technical Specifications

##### Mechanical Data

Male thread	M12x1.5
Wrench size	19 mm
Installation torque	15 Nm
Weight w/o wire	24.6 g
Sealing	Not included

##### Electrical Data

Characteristic	NTC
Nominal resistance at 20°C	2.5 kOhm ± 5%

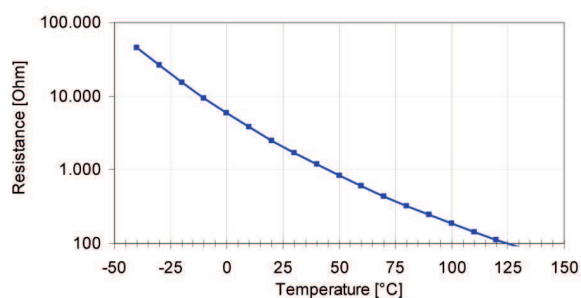


#### Connectors and Wires

Connector	Bosch Compact
Mating connector	D261.205.288-01
2-pole Jetronic	
Pin 1	SIG+
Pin 2	SIG-

#### Installation Notes

The NTC M12-L can be connected directly to most control units using a pull-up resistor (typically 1 or 3 kOhm).

#### Dimensions

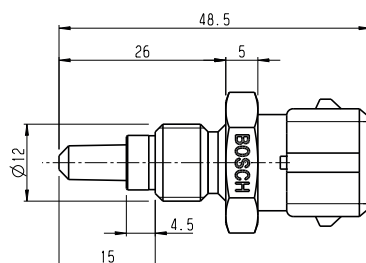

#### Characteristic

Accuracy at 25°C	± 1.4°C
Accuracy at 100°C	± 3.4°C
Response time tau 63 in still water	< 10 s

#### Characteristic Application

T [°C]	R [Ohm]
-40	45,313
-30	26,114
-20	15,462
-10	9,397
0	5,896
10	3,792
20	2,500
30	1,707
40	1,175
50	834
60	596
70	436
80	323
90	243
100	187
110	144
120	113
130	89
140	71

Any mounting orientation is possible.

Please find further application hints in the offer drawing and free download of the sensor configuration file (\*.sdf) for the Bosch Data Logging System at our homepage.

#### Safety Note

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

#### Legal Restrictions

Due to embargo restrictions, sale of this product in Russia, Belarus, Iran, Syria, and North Korea is prohibited.

#### Ordering Information

**Temperature Sensor NTC M12-L**  
Order number **0280.130.039**